



# NS SERIES

# 28-847SA

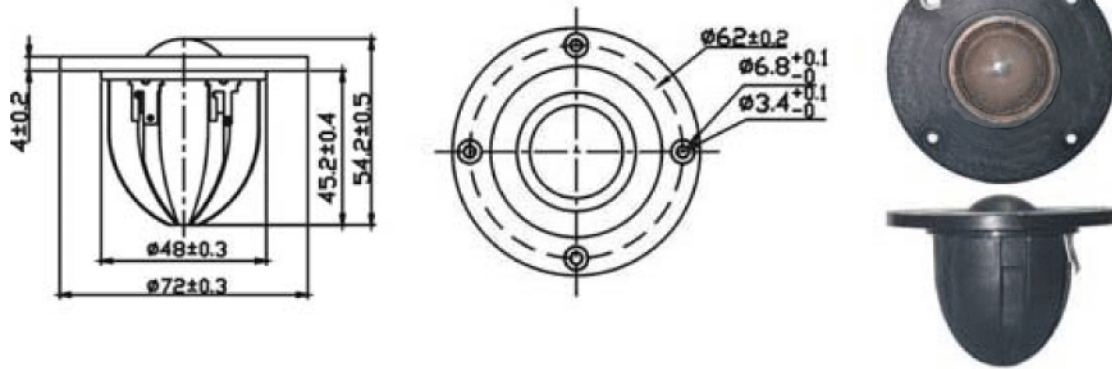

- SOFT FABRIC DOME DIAPHRAGM COATING WITH HIGH LOSS MATERIAL
- FERROFLUID COOLED
- HIGH DAMPLING COMPOSITE MATERIAL FOR FRONT PANEL & BACK CHAMBER
- MAGNETICALLY SHIELD
- BACK CHAMBER DESIGN

## 28mm FABRIC TWEETER

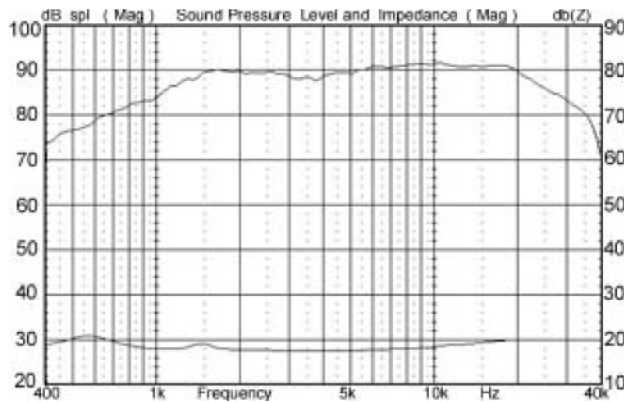

DIAPHRAGM MTL	Fabric
SURROUND MTL	N/A
NOMINAL IMPEDANCE	8 Ω
DCR IMPEDANCE	6 Ω
SENSITIVITY 1W/1m	90 dB
FREQUENCY RESPONSE	600-20K Hz
FREE AIR RESONANCE	600 Hz
VOICE COIL DIAMETER	28 mm
AIR GAP HEIGHT	2 mm
RATED POWER INPUT	15 W
MAXIMUM POWER INPUT	120 W
FORCE FACTOR, BL	N/A
MAGNET WEIGHT ( oz)	Neodymium
MOVING MASS	N/A
FERRO FLUID ENHANCED	Yes
X-max	N/A
Vas	N/A
Qts	N/A



SPEAKERS

TAIPEI, TAIWAN  
880 FA#886 2-25560168

Qms

N/A

Qes

N/A

CLOSE

P.O. BOX 10-53 NEW  
VOICE#886 2-255702