


# SUPER-X<sup>®</sup> PRO CX2310

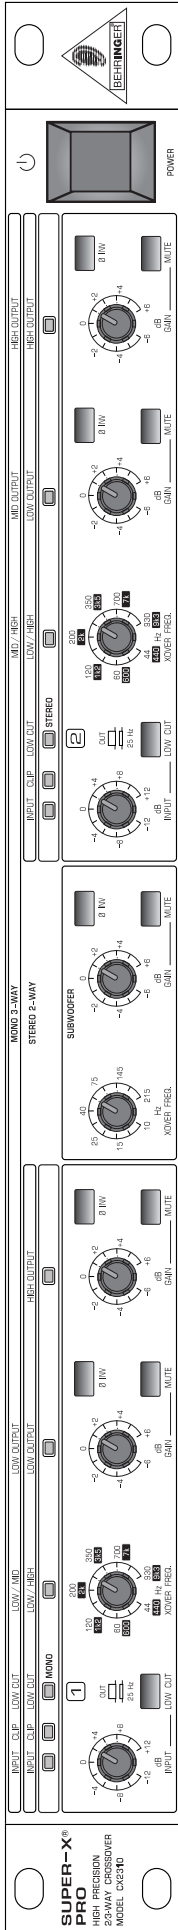

## Technical Specifications

Version 1.0 March 2001


ENGLISH



[www.behringer.com](http://www.behringer.com)

# SUPER-X<sup>®</sup> PRO

High-precision stereo 2-way/mono 3-way crossover with subwoofer output

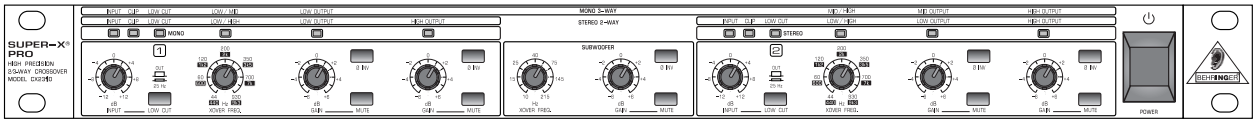

- ▲ Professional, high-precision stereo 2-way/mono 3-way crossover with separate subwoofer output
- ▲ World-class performance 24 dB per octave Linkwitz-Riley filters
- ▲ Absolutely flat summed amplitude response, zero phase difference
- ▲ Separate subwoofer section with independent frequency control
- ▲ Individual output level controls for all bands
- ▲ Individual output mutes for easy band adjustment
- ▲ Individual phase reverse switches for instant phase correction
- ▲ Switchable 25 Hz subsonic filter on each input for low-frequency driver protection
- ▲ Servo-balanced, gold-plated XLR connectors for all inputs and outputs
- ▲ Ultra-high precision ALPS potentiometers for ultimate accuracy and repeatability
- ▲ Ultra low-noise audio operational 4580 amplifiers for outstanding sound performance
- ▲ Illuminated switches for secure operation in dark stage environments
- ▲ High-quality components and exceptionally rugged construction for long life and reliability
- ▲ Shielded toroidal mains transformer for minimal noise interference
- ▲ Manufactured under ISO9000 certified management system

CX2310

## SPECIFICATIONS

### INPUTS

Connectors	XLR
Type	Electronically servo-balanced, HF filtered
Impedance	balanced >50 kOhm, unbalanced >25 kOhm
Max. Input level	+22 dBu typical, balanced or unbalanced
CMRR	>40 dB, typical >55 dB at 1 kHz

### OUTPUTS

Connectors	XLR
Type	Electronically servo-balanced, HF filtered
Impedance	balanced 60 Ohm, unbalanced 30 Ohm
Max. Output level	+20 dBm balanced/unbalanced

### PERFORMANCE

Bandwidth	20 Hz to 20 kHz, +0/-0.5 dB	
Frequency response	<5 Hz to >60 kHz, +0/-3 dB	
Signal to noise	Ref.: +4 dBu, 20 Hz to 20 kHz, unweighted	
	<b>Stereo-Mode:</b>	<b>Mono-Mode:</b>
Low output	>93 dB	>93 dB
Mid output		>95 dB
High output	>91 dB	>91 dB
Interchannel crosstalk	High to Low:	<93 dB
	High to Mid:	<94 dB
	Mid to Low:	<95 dB

### CROSSOVER

Filter-Type	Linkwitz-Riley, 24 dB/octave, state-variable	
<b>Mono Mode Frequencies</b>	<b>x1</b>	<b>x10</b>
Low/High	44 to 930 Hz	440 Hz to 9.3 kHz
Low/Mid	44 to 930 Hz	440 Hz to 9.3 kHz
Mid/High	440 Hz to 9.3 kHz	
<b>Stereo Mode Frequencies</b>	<b>x1</b>	<b>x10</b>
Low/High	44 to 930 Hz	440 Hz to 9.3 kHz

### POWER SUPPLY

Mains voltage	USA/Canada	120 V ~, 60 Hz
	U.K./Australia	240 V ~, 50 Hz
	Europe	230 V ~, 50 Hz
	General Export Model	100 - 120 V ~, 200 - 240 V ~, 50 - 60 Hz
Power consumption	<17 W	
Fuse	UL	100 -120 V ~: <b>T 630 mA H</b>
	Europe	200 - 240 V ~: <b>T 315 mA H</b>
	JP	90 - 110 V ~: <b>T 630 mA H</b>
Mains connection	Standard IEC receptacle	

### PHYSICAL/WEIGHT

Dimensions	approx. 1 ¾" (44.5 mm) * 19" (482.6 mm) * 8 ½" (217 mm)
Weight	approx. 3 kg

BEHRINGER is constantly striving to maintain the highest professional standards. As a result of these efforts, modifications may be made from time to time to existing products without prior notice. Specifications and appearance may differ from those listed or illustrated.

---

The information contained in this sheet is subject to change without notice. No part of this sheet may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording of any kind, for any purpose, without the express written permission of BEHRINGER INTERNATIONAL.

BEHRINGER and SUPER-X are registered trademarks. ALL RIGHTS RESERVED.

© 2005 BEHRINGER International GmbH.

BEHRINGER International GmbH, Hanns-Martin-Schleyer-Str. 36-38, 47877 Willich, Germany

Tel. +49 2154 9206 4149, Fax +49 2154 9206 4199

---