



Aluminum Electrolytic Capacitors

RXJ

Features

- 105°C, 2,000 ~ 5,000 hours assured
- Low ESR, suitable for switching power supplies
- Smaller size with large permissible ripple current
- RoHS Compliance




Sleeve & Marking Color: Brown & White

SPECIFICATIONS

Items	Performance																																			
Category Temperature Range	-55°C ~ +105°C																																			
Capacitance Tolerance	±20% (at 120Hz, 20°C)																																			
Leakage Current (at 20°C)	I = 0.01CV or 3 (μA) whichever is greater (after 2 minutes) Where, C = rated capacitance in μF V = rated DC working voltage in V																																			
Dissipation Factor (Tan δ at 120Hz, 20°C)	<table border="1"> <thead> <tr> <th>Rated Voltage</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> </tr> </thead> <tbody> <tr> <td>Tan δ (max)</td> <td>0.22</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.09</td> <td>0.08</td> </tr> </tbody> </table> <p>When the capacitance exceeds 1,000 μF, 0.02 shall be added every 1,000 μF increase.</p>	Rated Voltage	6.3	10	16	25	35	50	63	100	Tan δ (max)	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08																	
Rated Voltage	6.3	10	16	25	35	50	63	100																												
Tan δ (max)	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08																												
Low Temperature Characteristics (at 120Hz)	<p>Impedance ratio shall not exceed the values given in the table below.</p> <table border="1"> <thead> <tr> <th colspan="2">Rated Voltage</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> </tr> </thead> <tbody> <tr> <td>Impedance Ratio</td> <td>Z(-55°C)/Z(+20°C)</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> </tbody> </table>	Rated Voltage		6.3	10	16	25	35	50	63	100	Impedance Ratio	Z(-55°C)/Z(+20°C)	4	4	3	3	3	3	3	3															
Rated Voltage		6.3	10	16	25	35	50	63	100																											
Impedance Ratio	Z(-55°C)/Z(+20°C)	4	4	3	3	3	3	3	3																											
Endurance	<table border="1"> <thead> <tr> <th>Test Time</th> <td>2,000 Hrs for φD ≤ 8 mm; 5,000 Hrs for φD ≥ 10 mm</td> </tr> <tr> <th>Capacitance Change</th> <td>Within ±20% of initial value</td> </tr> <tr> <th>Dissipation Factor</th> <td>Less than 200% of specified value</td> </tr> <tr> <th>Leakage Current</th> <td>Within specified value</td> </tr> </thead> </table> <p>* The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied with rated ripple current for 2,000/5,000 hours at 105°C.</p>	Test Time	2,000 Hrs for φD ≤ 8 mm; 5,000 Hrs for φD ≥ 10 mm	Capacitance Change	Within ±20% of initial value	Dissipation Factor	Less than 200% of specified value	Leakage Current	Within specified value																											
Test Time	2,000 Hrs for φD ≤ 8 mm; 5,000 Hrs for φD ≥ 10 mm																																			
Capacitance Change	Within ±20% of initial value																																			
Dissipation Factor	Less than 200% of specified value																																			
Leakage Current	Within specified value																																			
Shelf Life Test	<table border="1"> <thead> <tr> <th>Test Time</th> <td>1,000 Hrs</td> </tr> <tr> <th>Capacitance Change</th> <td>Within ±20% of initial value</td> </tr> <tr> <th>Dissipation Factor</th> <td>Less than 200% of specified value</td> </tr> <tr> <th>Leakage Current</th> <td>Within specified value</td> </tr> </thead> </table> <p>* The above specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.</p>	Test Time	1,000 Hrs	Capacitance Change	Within ±20% of initial value	Dissipation Factor	Less than 200% of specified value	Leakage Current	Within specified value																											
Test Time	1,000 Hrs																																			
Capacitance Change	Within ±20% of initial value																																			
Dissipation Factor	Less than 200% of specified value																																			
Leakage Current	Within specified value																																			
Ripple Current & Frequency Multipliers	<table border="1"> <thead> <tr> <th>Cap.(μF) \ Freq.(Hz)</th> <th>60 (50)</th> <th>120</th> <th>500</th> <th>1k</th> <th>10k</th> <th>100k</th> </tr> </thead> <tbody> <tr> <td>Under 33</td> <td>0.40</td> <td>0.55</td> <td>0.65</td> <td>0.80</td> <td>0.90</td> <td>1.00</td> </tr> <tr> <td>39 ~ 330</td> <td>0.60</td> <td>0.70</td> <td>0.80</td> <td>0.90</td> <td>0.95</td> <td>1.00</td> </tr> <tr> <td>390 ~ 1,000</td> <td>0.65</td> <td>0.80</td> <td>0.85</td> <td>0.98</td> <td>1.00</td> <td>1.00</td> </tr> <tr> <td>1,200 up above</td> <td>0.80</td> <td>0.90</td> <td>0.95</td> <td>0.98</td> <td>1.00</td> <td>1.00</td> </tr> </tbody> </table>	Cap.(μF) \ Freq.(Hz)	60 (50)	120	500	1k	10k	100k	Under 33	0.40	0.55	0.65	0.80	0.90	1.00	39 ~ 330	0.60	0.70	0.80	0.90	0.95	1.00	390 ~ 1,000	0.65	0.80	0.85	0.98	1.00	1.00	1,200 up above	0.80	0.90	0.95	0.98	1.00	1.00
Cap.(μF) \ Freq.(Hz)	60 (50)	120	500	1k	10k	100k																														
Under 33	0.40	0.55	0.65	0.80	0.90	1.00																														
39 ~ 330	0.60	0.70	0.80	0.90	0.95	1.00																														
390 ~ 1,000	0.65	0.80	0.85	0.98	1.00	1.00																														
1,200 up above	0.80	0.90	0.95	0.98	1.00	1.00																														

DIAGRAM OF DIMENSIONS

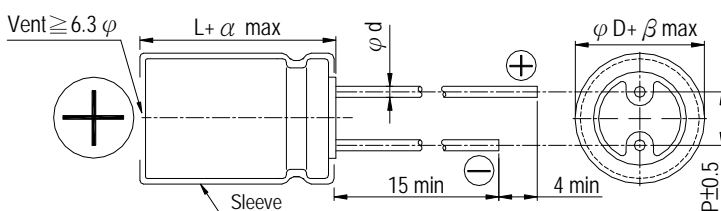

LEAD SPACING AND DIAMETER

Unit: mm

φ D	5	6.3	8	10	12.5	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
φ d	0.5		0.6			0.8	
α	1.0			1.5			
β	0.5						



Aluminum Electrolytic Capacitors

RXJ

Dimension: $\phi D \times L(\text{mm})$

Ripple Current: mA/rms at 100k Hz, 105°C

DIMENSION & PERMISSIBLE RIPPLE CURRENT

V. DC Item μF	6.3V (0J)					10V (1A)					16V (1C)				
	$\phi D \times L$	Impedance (Ω , Max/100K Hz)		Ripple Current (mA/rms, 105°C)		$\phi D \times L$	Impedance (Ω , Max/100K Hz)		Ripple Current (mA/rms, 105°C)		$\phi D \times L$	Impedance (Ω , Max/100K Hz)		Ripple Current (mA/rms, 105°C)	
		20°C	-10°C	120 Hz	100k Hz		20°C	-10°C	120 Hz	100k Hz		20°C	-10°C	120 Hz	100k Hz
33											5×11	1.30	3.90	108	154
39											5×11	1.30	3.90	108	154
47						5×11	2.10	5.50	78	111	6.3×11	0.60	1.80	182	260
56						5×11	1.90	4.80	85	121	6.3×11	0.60	1.80	182	260
68						5×11	1.30	3.90	108	154	6.3×11	0.60	1.80	182	260
100	5×11	1.30	3.90	108	154	6.3×11	0.60	1.80	182	260	6.3×11	0.60	1.80	182	260
220	6.3×11	0.60	1.80	182	260	8×11.5	0.33	0.99	280	400	8×11.5	0.33	0.99	320	400
330	8×11.5	0.33	0.88	280	400	8×11.5	0.33	0.99	280	400	10×12.5	0.25	0.75	360	510
390	8×11.5	0.33	0.88	320	400	10×12.5	0.27	0.75	410	510	10×16	0.19	0.57	510	635
470	10×12.5	0.25	0.75	410	510	10×12.5	0.25	0.75	410	510	10×16	0.19	0.57	510	635
560	10×12.5	0.25	0.75	410	510	10×16	0.19	0.57	510	635	10×20	0.14	0.42	775	860
680	10×16	0.19	0.57	510	635	10×16	0.19	0.57	510	635	10×20	0.14	0.42	775	860
1,000	10×20	0.14	0.42	690	860	10×20	0.14	0.37	690	860	12.5×20	0.085	0.26	1,000	1,250
1,200	10×20	0.14	0.42	775	860	10×25	0.12	0.30	930	1,030	12.5×20	0.085	0.26	1,125	1,250
2,200	12.5×20	0.085	0.26	1,125	1,250	12.5×25	0.070	0.21	1,200	1,355	12.5×25	0.070	0.21	1,200	1,355
3,300	12.5×25	0.070	0.21	1,200	1,355	12.5×25	0.070	0.21	1,200	1,355	16×31.5	0.048	0.14	1,830	2,030
4,700	16×25	0.060	0.18	1,595	1,770	16×31.5	0.048	0.14	1,830	2,030	16×35.5	0.044	0.13	2,065	2,295

V. DC Item μF	25V (1E)					35V (1V)					50V (1H)				
	$\phi D \times L$	Impedance (Ω , Max/100K Hz)		Ripple Current (mA/rms, 105°C)		$\phi D \times L$	Impedance (Ω , Max/100K Hz)		Ripple Current (mA/rms, 105°C)		$\phi D \times L$	Impedance (Ω , Max/100K Hz)		Ripple Current (mA/rms, 105°C)	
		20°C	-10°C	120Hz	100KHz		20°C	-10°C	120Hz	100KHz		20°C	-10°C	120Hz	100KHz
1											5×11	5.0	15.0	43	78
2.2											5×11	4.0	12.0	48	88
3.3											5×11	3.50	11.0	52	94
4.7											5×11	3.00	9.00	55	100
6.8											5×11	3.00	9.00	55	100
10											5×11	2.00	6.00	68	124
22						5×11	1.30	3.90	108	154	6.3×11	0.60	1.80	143	260
33	5×11	1.30	3.90	108	154	6.3×11	0.60	1.80	182	260	6.3×11	0.60	1.80	143	260
39	6.3×11	0.60	1.80	182	260	6.3×11	0.60	1.80	182	260	6.3×11	0.60	1.80	182	260
47	6.3×11	0.60	1.80	182	260	6.3×11	0.60	1.80	182	260	8×11.5	0.33	0.99	320	400
56	6.3×11	0.60	1.80	182	260	6.3×11	0.60	1.80	182	260	8×11.5	0.33	0.99	320	400
68	6.3×11	0.60	1.80	182	260	6.3×11	0.60	1.80	182	260	8×11.5	0.33	0.99	320	400
100	8×11.5	0.33	0.99	320	400	8×11.5	0.33	0.99	320	400	10×16	0.19	0.57	445	635
220	10×12.5	0.25	0.75	360	510	10×16	0.19	0.57	445	635	10×25	0.12	0.30	825	1,030
330	10×16	0.19	0.57	445	635	10×20	0.12	0.42	600	860	12.5×20	0.085	0.26	875	1,250
390	10×20	0.14	0.42	775	965	10×25	0.12	0.30	930	1,030	12.5×25	0.070	0.21	1,085	1,355
470	10×20	0.14	0.42	775	965	12.5×20	0.085	0.26	1,000	1,250	12.5×25	0.070	0.21	1,085	1,355
560	10×25	0.12	0.30	930	1,030	12.5×20	0.085	0.26	1,000	1,250	12.5×25	0.070	0.21	1,085	1,355
680	12.5×20	0.085	0.26	1,000	1,250	12.5×25	0.070	0.21	1,085	1,355	16×25	0.060	0.18	1,415	1,770
1,000	12.5×25	0.070	0.23	1,080	1,355	12.5×25	0.070	0.21	1,085	1,355	16×25	0.060	0.18	1,595	1,770
1,200	12.5×25	0.070	0.21	1,200	1,355	12.5×25	0.070	0.21	1,200	1,355	16×31.5	0.048	0.14	1,830	2,030
2,200	16×25	0.060	0.18	1,595	1,770	16×35.5	0.044	0.13	2,065	2,295	18×40	0.037	0.10	2,465	2,740
3,300	16×35.5	0.044	0.13	2,065	2,295	18×40	0.037	0.10	2,465	2,740					
4,700	18×40	0.037	0.10	2,465	2,740										



Aluminum Electrolytic Capacitors

RXJ

Dimension: ϕ D×L(mm)

Ripple Current: mA/rms at 100k Hz, 105°C

DIMENSION & PERMISSIBLE RIPPLE CURRENT

V. DC Item μ F	63V (1J)					100V (2A)				
	ϕ D×L	Impedance (Ω , Max/100K Hz)		Ripple Current (mA/rms, 105°C)		ϕ D×L	Impedance (Ω , Max/100K Hz)		Ripple Current (mA/rms, 105°C)	
		20°C	-10°C	120 Hz	100k Hz		20°C	-10°C	120 Hz	100k Hz
1						5×11	7.0	25.0	36	66
2.2						5×11	6.00	21.0	40	72
3.3						5×11	5.00	18.0	43	78
4.7						6.3×11	1.20	4.20	100	180
6.8						6.3×11	1.20	4.20	100	180
10	6.3×11	1.20	4.20	100	180	8×11.5	0.56	2.00	168	305
22	6.3×11	1.20	4.20	100	180	8×11.5	0.56	2.00	168	308
33	8×11.5	0.56	2.00	170	305	10×12.5	0.50	1.80	210	380
39	8×11.5	0.56	2.00	170	305	10×16	0.32	1.10	350	500
47	8×11.5	0.56	2.00	170	305	10×20	0.27	0.95	435	620
56	10×12.5	0.50	1.80	265	380	10×20	0.27	0.95	435	620
68	10×12.5	0.50	1.80	265	380	10×25	0.21	0.63	530	760
100	10×20	0.27	0.95	435	620	12.5×20	0.16	0.56	625	890
220	12.5×20	0.094	0.24	570	820	16×25	0.090	0.32	1,010	1,440
330	12.5×25	0.073	0.21	770	1,100	16×31.5	0.060	0.17	1,255	1,790
390	12.5×25	0.073	0.21	770	1,100	16×35.5	0.056	0.14	1,650	2,065
470	16×25	0.060	0.18	1,420	1,770					
560	16×31.5	0.048	0.14	1,625	2,030					
680	16×31.5	0.048	0.14	1,625	2,030					
1,000	18×35.5	0.041	0.11	1,790	2,240					