



NS SERIES


25-669B

(TS25P601)



- SOFT FABRIC DOME DIAPHRAGM COATED WITH HIGH LOSS MATERIAL
- FERROFLUID COOLED
- DAMPWOOL IN CAVITY OF POLE PIECE
- DAMPING COMPOSITE MATERIAL OF FRONT PANEL

1" FABRIC TWEETER

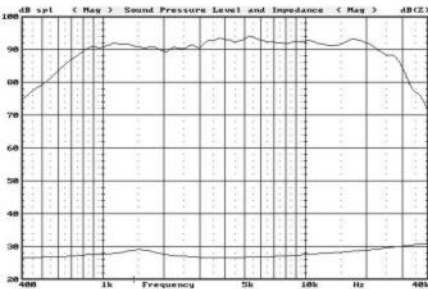

DIAPHRAGM MTL	Natural silk
SURROUND MTL	N/A
NOMINAL IMPEDANCE	8 Ω
DCR IMPEDANCE	5.4 Ω
SENSITIVITY 1W/1m	91 dB
FREQUENCY RESPONSE	1500 - 25 K Hz
FREE AIR RESONANCE	1500 Hz
VOICE COIL DIAMETER	25 mm
AIR GAP HEIGHT	3 mm
RATED POWER INPUT	8 W
MAXIMUM POWER INPUT	80 W
FORCE FACTOR, BL	N/A
MAGNET WEIGHT	(8 oz) 216 g
MOVING MASS	N/A
FERROFLUID ENHANCED	Yes
SUSPENSION COMPLIANCE	N/A
EFFECTIVE PISTON AREA	N/A
X-max	N/A
Vas	N/A
Qts	N/A
Qms	N/A
Qes	N/A

TB SPEAKERS

P.O. BOX 10 53 NEI HU, TAIPEI, TAIWAN
 VOICE: 886.2.26570282 FAX: 886.2.26580166