



SPECIFICATION

SERIES NUMBER: MR-22


Contact Rating: 12A 125/250VAC(UL, CSA)
 8A/100A 250V~T85 1E4
 12(4)A 250V~T85 1E4(N,S,D,FI,VDE)
 Contact Resistance: 20mΩ (max) at initial
 Insulation Resistance: 500MΩ (min) 500VDC
 Dielectric Strength: 2000VAC/1 minute
 Electrical Life: 10,000 cycles
 Operation Force: 650+/-200g
 Operation Temperature: 0~85C

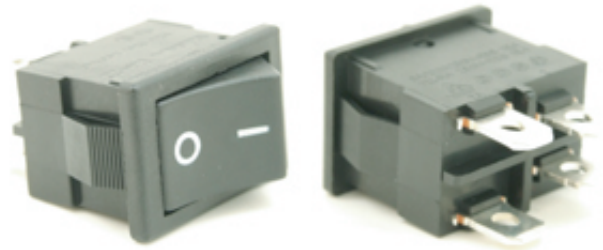

PART NUMBERING SYSTEM

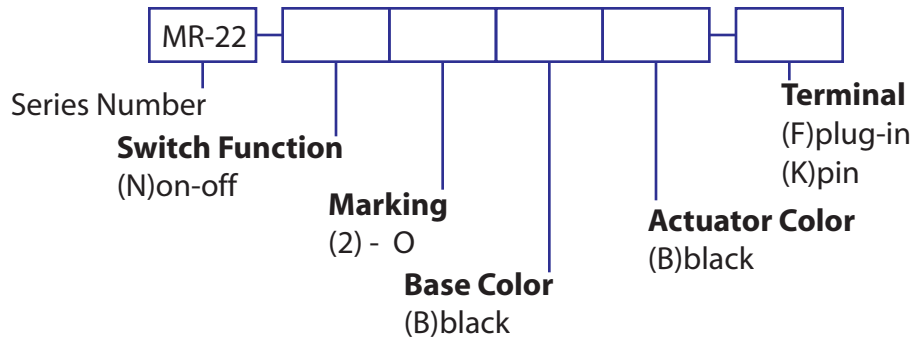

DIMENSIONS(mm)

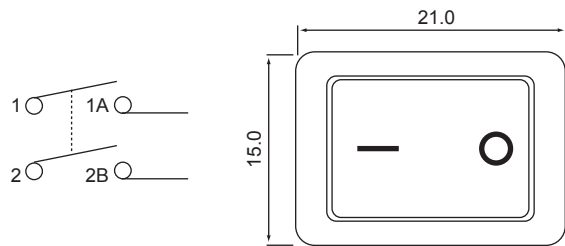

MOUNTING HOLE	PANEL DIMENSIONS		
	Thickness	Side x	Side y
	0.75-1.25	19.2-19.1	13.0-12.9
	1.25-2.00	19.4-19.3	13.0-12.9
	2.00-3.00	19.8-19.7	13.0-12.9

