
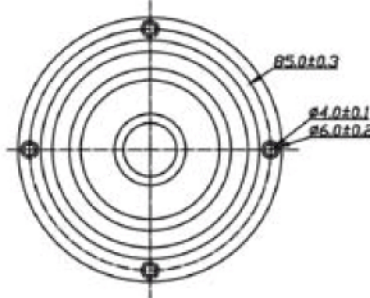


F SERIES


W3-879S

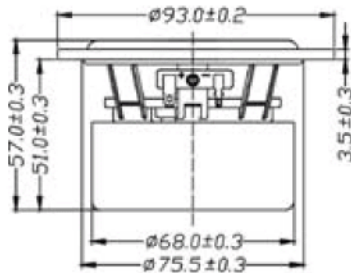

- UNDERHUNG DESIGN
- BLACK ALUMINUM PHASE PLUG
- FULL RANGE FREQUENCY RESPONSE
- COSMETIC STAMPED FRAME
- PAPER CONE WITH SANTOPRENE SURROUND
- MAGNETICALLY SHIELD

3" PAPER MID-RANGE / FULL RANGE

DIAPHRAGM MTL	Paper
SURROUND MTL	Santoprene
NOMINAL IMPEDANCE	8 Ω
DCR IMPEDANCE	6.6 Ω
SENSITIVITY 1W/1m	86 dB
FREQUENCY RESPONSE	105 - 20K Hz
FREE AIR RESONANCE	105 Hz
VOICE COIL DIAMETER	20 mm
AIR GAP HEIGHT	6 mm
RATED POWER INPUT	15 W
MAXIMUM POWER INPUT	30 W
FORCE FACTOR, BL	3.5 TM
MAGNET WEIGHT (4 oz)	120 g
MOVING MASS	1.66 g
FERRO FLUID ENHANCED	No
SUSPENSION COMPL.	1152 MN ⁻¹
EFFEC.PISTON AREA	0.0030 m ²
X-max	0.5 mm
Vas	1.7 Litr
Qts	0.59
Qms	7.22
Qes	0.65

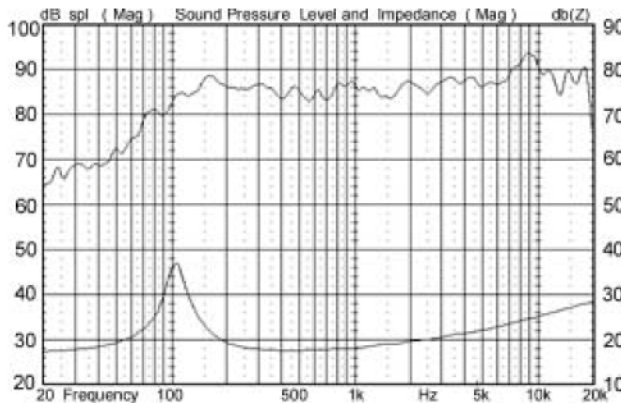

P.O. BOX 10-53 NEI HU, TAIPEI, TAIWAN
 VOICE 886.2.26570282 FAX 886.2.26580168

CLOSE