
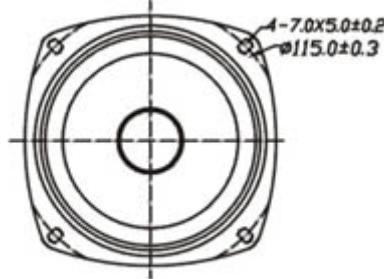



F SERIES

W4-616S



- FULL RANGE DESIGN
- HOME HI-FI, HOME THEATER, MID BASS APPLICATION
- STAMPED STEEL BASKET
- PAPER CONE WITH RUBBER SURROUND
- MAGNETICALLY SHIELDED
- ALUMINUM PHASE PLUG

4" PAPER CONE/ FULL RANGE, WOOFER

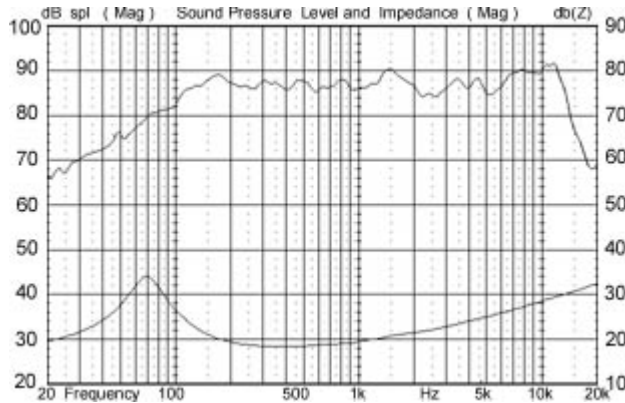

DIAPHRAGM MTL	Paper
SURROUND MTL	Rubber
NOMINAL IMPEDANCE	8 Ω
DCR IMPEDANCE	6 Ω
SENSITIVITY 1W/1m	88 dB
FREQUENCY RESPONSE	70-14K Hz
FREE AIR RESONANCE	70 Hz
VOICE COIL DIAMETER	25 mm
AIR GAP HEIGHT	5 mm
RATED POWER INPUT	40 W
MAXIMUM POWER INPUT	80 W
FORCE FACTOR, BL	5.4 TM
MAGNET WEIGHT (11 oz)	308 g
MOVING MASS	4 g
FERRO FLUID ENHANCED	No
SUSPENSION COMPL.	1347 MN ⁻¹
EFFEC.PISTON AREA	0.0057 m ²
X-max	3 mm
Vas	5.6 Litr
Qts	0.34
Qms	2.80
Qes	0.38



P.O. BOX 10-53 NEI HU, TAIPEI, TAIWAN
VOICE 886.2.26570282 FAX 886.2.26580166

CLOSE