





PART NO.	ENG. NO.
02-09-1119	1381-A(P901)L
02-09-1117	1381-A(P901)
02-09-1115	1381-A(P901)1
02-09-5133	1381-A(P591)L
02-09-5130	1381-A(P591)
02-09-5142	1381-A(P550)L
02-09-5143	1381-A(550)



SECT. "A-A"

SECT. "B-B"






LEGEND

1381-A(****)*


P = PREPLATE
BLANK = POSTPLATE

FORM
BLANK = STD. CHAIN
1 = STD. CHAIN WITH INTERLEAF PAPER
L = LOOSE

FINISH CODE

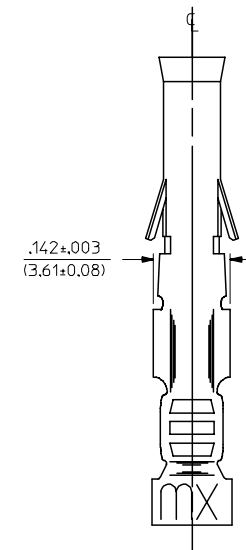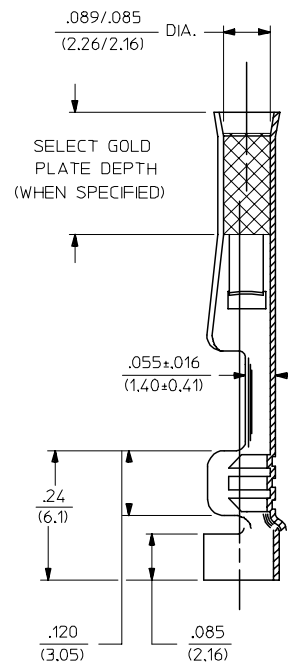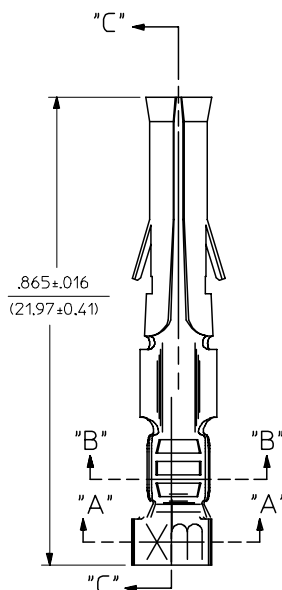

SECT. "C-C"



CHAIN FORM
FULL SCALE

NOTES:

- MATERIAL: BRASS
- FINISH:
 - 901 HOT TIN DIP .000020/(0.00051) MIN.
 - 591 SELECT GOLD PLATE .000050/(0.00127) MIN. IN CONTACT AREA, OVER .000050/(0.00127) MIN. NICKEL OVERALL WITH .000010/(0.00025) MAX. GOLD FLASH OVERALL.
 - 550 SELECT GOLD PLATE .000015/(0.00038) MIN. IN CONTACT AREA, OVER .000030/(0.00076) MIN. NICKEL OVERALL WITH .000010/(0.00025) MAX. GOLD FLASH OVERALL.
- PRODUCT SPECIFICATION PS-43660-9999.
- PACKAGING INFORMATION: NOT AVAILABLE
- TERMINAL FOR USE WITH .093/(2.36) SERIES HOUSINGS AND WILL ACCEPT 18-22 AWG WIRE
- INSERTION FORCE: 3.5 LBS. MAX. WHEN TERMINAL IS INSERTED INTO AN .093 SERIES HOUSING.
- TERMINAL RETENTION: 20 LBS. MIN. FROM HOUSING.

REMOVE DIMPLE P/NS EC NO: UCP2006-2900 DRAWN: P/DER 2006/06/29 CHKD: AEL/HAG 2006/07/05 APPR: FSI/TH 2006/07/05		QUALITY SYMBOLS =0 =0		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 6:1		DESIGN UNITS INCH		THIRD ANGLE PROJECTION	
4 PLACES ± --- ± ---		mm		INCH		DRAWN BY GEP		DATE 1987/11/06		TITLE CRIMP TERMINAL, FEMALE		.093/(2.36) DIA.	
3 PLACES ± --- ± ---		mm		INCH		CHECKED BY RW		DATE 1987/11/06		18-22 AWG			
2 PLACES ± 0.13 ± 0.10		mm		INCH		APPROVED BY RAS		DATE 1987/11/06		MOLEX INCORPORATED			
1 PLACE ± 0.25 ± ---		mm		INCH		MATERIAL NO.		DOCUMENT NO.		SD-1381-*		SHEET NO.	
ANGULAR ± 1/2°		mm		INCH		SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				1 OF 1	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS													